




# ANKKASON Conduz INC.

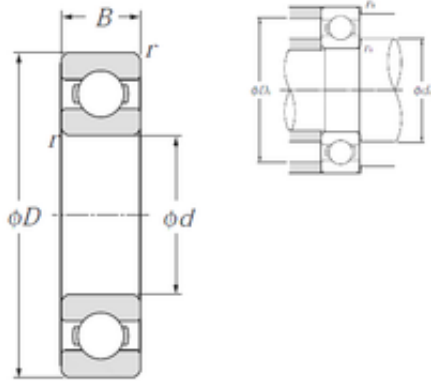

## Industrial Bearing Deep Groove Ball Bearing 6305 6306 6307 6304 6303 2RS Zz NTN Ball Bearing

Bearing No. 6305

6305 Bearing 2D drawings and 3D CAD models

Size	25x62x17 mm
Bore Diameter	25 mm
Outer Diameter	62 mm
Width	17 mm
d	25 mm
D	62 mm
B	17 mm
C	17 mm
r min.	1,1 mm
da min.	31,5 mm
da max	35 mm
Da max.	55,5 mm
ra max.	1 mm
Weight	0,232 Kg
Basic dynamic load rating (C)	21,2 kN
Basic static load rating (C0)	10,9 kN
(Grease) Lubrication Speed	12 000 r/min
(Oil) Lubrication Speed	14 000 r/min
rs min	1.1 mm
Radial clearance class	CN
Mass	0.23 kg
Dynamic load, C	21.2 kN
Static load, C0	10.9 kN
Fatigue limit load, Cu	0.5 kN



## ANKKASON Conduz INC.

f0	12.6
Nlim (oil)	14,000 rpm
Nlim (grease)	12,000 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.37 Hz
Characteristic rolling element frequency, BSF	3.66 Hz
Characteristic outer ring frequency, BPF0	2.61 Hz
Characteristic inner ring frequency, BRFI	4.39 Hz
da min	31.5 mm
Da max	55.5 mm
ra max	1 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.228
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric



## ANKKASON Conduz INC.

Long Description	25MM Bore; 62MM Outside Diameter; 17MM Outer Race Width; Open; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Other Features	Deep Groove
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	6305
Weight / LBS	0.511
Inner Race Width	0 Inch   0 Millimeter
Outside Diameter	2.441 Inch   62 Millimeter
Bore	0.984 Inch   25 Millimeter
Outer Race Width	0.669 Inch   17 Millimeter
bore diameter:	25 mm
finish/coating:	Uncoated
outside diameter:	62 mm
bearing material:	High Carbon Chrome Steel
overall width:	17 mm
cage material:	Steel
bore type:	Round
inner ring width:	17 mm
closure type:	Open
outer ring width:	17 mm
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	12000 rpm



## ANKKASON Conduz INC.

snap ring included:	Without Snap Ring
maximum rpm (oil):	14000 rpm
internal clearance:	CN
fillet radius:	1.1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	1400 RPM
dynamic load capacity:	21200 N
series:	63
static load capacity:	10900 N
manufacturer product page:	<a href="#">Click here</a>
precision rating:	Class 0